

Lightning strike counter for flat tape and cable




Indicative product image

Technical Data		Value	Units
Commercial data			
Code		77920130	
Part Number		CDR-401	
Status		Available	
Dimensions			
Product height		174	[mm]
Product width		107	[mm]
Product length		51	[mm]
Product weight		385	[gr]
General data			
Product standards		EN 62561-6:2011	
Certifications		CE	
Housing color		RAL 9005	
Insulating material & flammability class		PA66; V-0 + UV	
Enclosure		IP 67	
Temperature range		-20 °C ... +65 °C	
Technical features			
Threshold current (8/20)	l _{tc}	1	[kA]
Max. countable and withstood discharge current (10/350)	I _{mcw}	150	[kA]
Metering range		0 ... 9999	
Down-conductor system		Cable, flat tape	
Max. flat tape width		30	[mm]
Min. flat tape width		25	[mm]

Technical Data	Value	Units
Max. flat tape thickness	6	[mm]
Min. flat tape thickness	2	[mm]
Max. diameter of cable	10	[mm]
Min. diameter of cable	6	[mm]

Wiring diagrams

Dimensions

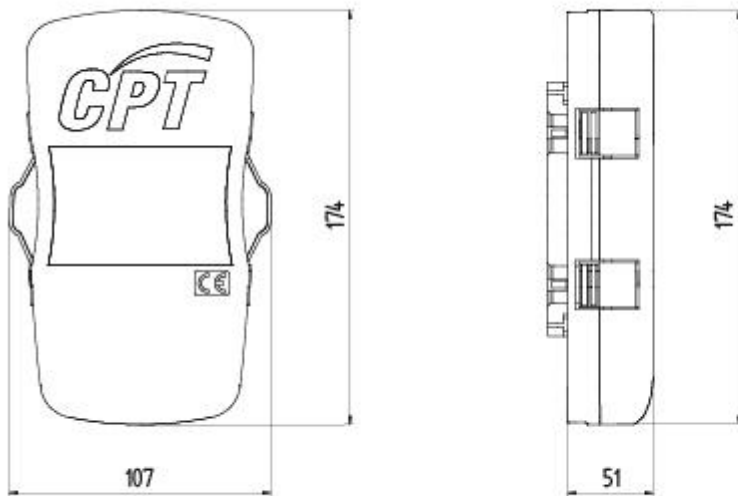

Wiring diagram

