

# DB15 12V-15HS

Signal Line SPDs  
Measurement and Control



## General Data

Format	Sub-D
Product standards	IEC 61643-21



## PART NUMBERS

DB15-12V/15HS

77820800

## SURGE PROTECTION DEVICE (SPD) - IEC TECHNICAL FEATURES

Maximum continuous operating voltage (AC) - $U_c$ (L1/L2-PE) [V]	16
Nominal voltage AC 50-60Hz - $U_n$ (L1/L2-PE) [V]	12
Nominal discharge current (8/20) - $I_n$ (L-PE) [kA]	0.5
Max Discharge Current (8/20) - $I_{max}$ (L-PE) [kA]	0.5
Voltage protection level at $I_n$ - $U_p$ (L-PE) [V]	$\leq 100$
Voltage protection level at $I_n$ - $U_p$ (L1/L2-GND) [V]	$\leq 25$

## TECHNICAL FEATURES

Network communication standards	Communication signals
Bandwidth [MHz]	2
Max. communication voltage [V]	12

## MECHANICAL AND ENVIRONMENTAL FEATURES

Housing color	Black
Enclosure - IP	IP20
Protected Wires	14 Wires + GND
Input connector	Sub-D
Output connector	Sub-D

## DATASHEET


This document is subject to change at any time without notice [www.cirprotec.com](http://www.cirprotec.com) | Lepanto 49 · 08223 Terrassa, Barcelona Spain © 2024 Cirprotec SLU | All rights reserved

**cirprotec**

# DB15 12V-15HS


Signal Line SPDs  
Measurement and Control

## DIMENSIONS AND WEIGHT

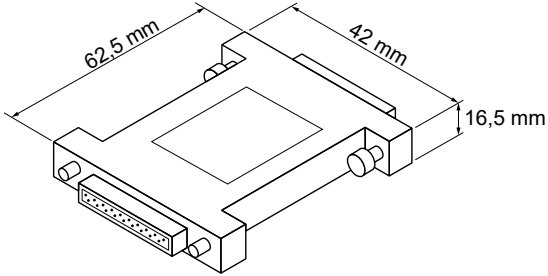

Net Weight [kg]	0.036
Gross weight [kg]	0.044
Packaging dimensions (H x W x L) [mm]	75 x 60 x 30

## INTERNAL CONFIGURATION



## DATASHEET

This document is subject to change at any time without notice [www.cirprotec.com](http://www.cirprotec.com) | Lepanto 49 · 08223 Terrassa, Barcelona Spain © 2024 Cirprotec SLU | All rights reserved