

# DB25-V24HS

Signal Line SPDs  
Measurement and Control



## General Data

Format	Sub-D
Product standards	IEC 61643-21



## PART NUMBERS

DB25-V24HS	77820160
------------	----------

## SURGE PROTECTION DEVICE (SPD) - IEC TECHNICAL FEATURES

Maximum continuous operating voltage (AC) - Uc (L1/L2-PE) [V]	16
Nominal voltage AC 50-60Hz - Un (L1/L2-PE) [V]	12
Nominal discharge current (8/20) - In (L-PE) [kA]	0.5
Max Discharge Current (8/20) - I <sub>max</sub> (L-PE) [kA]	0.5
Voltage protection level at In - Up (L-PE) [V]	≤100
Voltage protection level at In - Up (L1/L2-GND) [V]	≤25

## TECHNICAL FEATURES

Network communication standards	Communication signals
Bandwidth [MHz]	2
Max. communication voltage [V]	12

## MECHANICAL AND ENVIRONMENTAL FEATURES

Housing color	Black
Enclosure - IP	IP20
Protected Wires	17 Wires + GND
Input connector	Sub-D
Output connector	Sub-D

## DATASHEET


This document is subject to change at any time without notice [www.cirprotec.com](http://www.cirprotec.com) | Lepanto 49 · 08223 Terrassa, Barcelona Spain © 2024 Cirprotec SLU | All rights reserved

**cirprotec**

# DB25-V24HS


Signal Line SPDs  
Measurement and Control

## DIMENSIONS AND WEIGHT

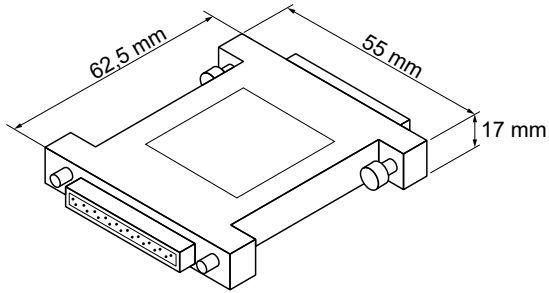

Net Weight [kg]	0.052
Gross weight [kg]	0.06
Packaging dimensions (H x W x L) [mm]	75 x 60 x 30

## INTERNAL CONFIGURATION

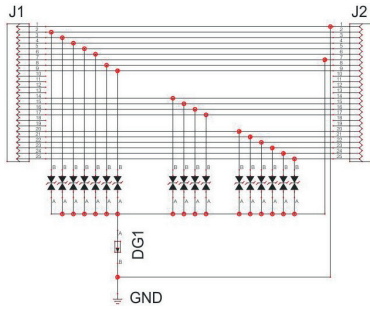

## DATASHEET

This document is subject to change at any time without notice [www.cirprotec.com](http://www.cirprotec.com) | Lepanto 49 · 08223 Terrassa, Barcelona Spain © 2024 Cirprotec SLU | All rights reserved