

EGARA 1 0+1

Power Line SPDs

DIN RAIL - IEC TYPE 1+2



General Data

Internal configuration	0+1
No. Poles	1-Pole
No. DIN rail modules	1
Network configuration	TT, TNS
IEC SPD Type	Class I+II
EN SPD Type	Type 1+2
UL SPD Type	Type 1 Component Assembly
Format	Pluggable
Protection Modes	N-PE
Product standards	IEC/EN 61643-11; UL 1449 5th Edition
Certifications	CE, Rohs, UKCA, KEMA-KEUR; ENEC; UL 1449 5th Edition
AC or DC	AC



PART NUMBERS

EGA 1 N/0+1

33738100

SURGE PROTECTION DEVICE (SPD) - IEC TECHNICAL FEATURES

Maximum back-up fuse [A [gG]]	315
Maximum continuous operating voltage (AC) - Uc [V]	255
Nominal voltage AC 50-60 Hz - Un [V]	Neutral
Nominal discharge current (8/20)- In [kA]	50
Max Discharge Current (8/20) - I _{max} [kA]	100
Lightning impulse current (10/350) - I _{imp} [kA]	50
Voltage protection level at In - Up [kV]	≤1,5
Following current - I _{fi} [A]	100
Residual current- IGND [mA]	<0,01
Response time - t _A [ns]	<100
Specific energy by pole (10/350 μs) - W/R (L-N) [kJ/ohm]	39
Specific energy by pole (10/350 μs) - W/R (N-PE) [kJ/ohm]	625
TOV 200ms (HV systems, withstand)- Ut [V]	1200
No. of ports	1

SURGE PROTECTION DEVICE (SPD) - UL TECHNICAL FEATURES

Nominal discharge current (8/20) - In [kA]	20
Maximum continuous operating voltage - MCOV (L-N) [V]	305
Maximum continuous operating voltage - MCOV (L-G) [V]	305
Voltage protection rating - VPR (L-N) [V]	1000
Voltage protection rating - VPR (L-G) [V]	1000

MECHANICAL AND ENVIRONMENTAL FEATURES

Temperature range [°C]	-40 ... 85
Humidity range [%]	5 ... 95
Max. Altitude [m]	4000

DATASHEET

This document is subject to change at any time without notice www.cirprotec.com | Lepanto 49 · 08223 Terrassa, Barcelona Spain © 2024 Cirprotec SLU | All rights reserved


cirprotec

EGARA 1 0+1

Continue MECHANICAL AND ENVIRONMENTAL FEATURES


Indication System Type	Green (OK) / Not Green (replace)
Insulating material	PA6 CT1 & PA66 CT1
Housing color	Grey RAL 7035
Enclosure - IP	IP20
Flammability class	V-0
Solid conductor cross section	1,5...35mm ²
Stranded conductor cross section	1,5...25mm ²
Torque rating [N.m]	3
Remote indication conductor cross section [mm ²]	0,5 ... 1,5
Remote indication switching capacity [V/A]	AC: 250/0,5 DC: 30/1

DIMENSIONS AND WEIGHT

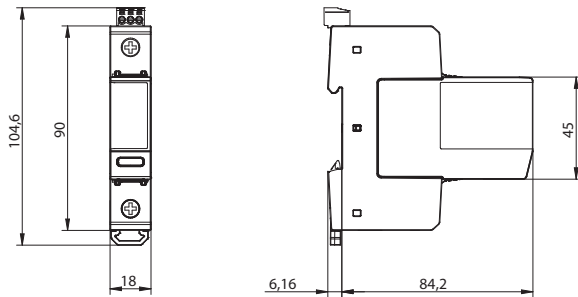

Net Weight [kg]	0.145
Gross weight [kg]	0.155
Packaging dimensions (H x W x L) [mm]	97 × 22 × 118

INTERNAL CONFIGURATION



DATASHEET

This document is subject to change at any time without notice www.cirprotec.com | Lepanto 49 · 08223 Terrassa, Barcelona Spain © 2024 Cirprotec SLU | All rights reserved